

# MODEL AC & BC

## Aluminum Dock Board Model AC & Model BC

For docks without a forklift, the Aluminum Dock Board is the ideal choice. Built for hand portability, the AC & BC Aluminum Dock Board offers the mobility of a dock plate while still providing set capacities you would expect from a steel dock board. Worried about moving the Dock board? We have you covered with the optional easy roll attachment; you'll never have to lift and position the Dock Board by hand again!



- Light Weight Easy To Move
- Bolt On Steel Curbs
- Fixed Lip Length
- Made To Order Options
- Ships Next Day
- (Optional) Forklift Notches
- All Aluminum Model Available (ATD)



## Light Weight

Available in either 3/8" or 1/2" thick aluminum decking, the aluminum dock board from Loading Dock Supply offers the capacity of steel dock board at a fraction of the weight. Ideal for loading applications without forklifts or when the environment is corrosive.

## Bolt On Steel Curbs

Building off from the aluminum dockplate, steel curbs provide weight capacities fixed at either 10,000 or 15,000 lbs, while also allowing for the attachment of lifting chains or the unique telescoping easy roll handle system.

## Optimal Lip Angle

All Dock Plates lips are adjusted 11° for transition in and out of the trailer or onto curbs.

## ANSI Rated Aluminum


Standard MH30.2 -- In addition to the test for overall strength, a longstanding practice for dockboard manufacturers, this standard incorporates a test which sets limits for deflection of product while under load. This test ensures the integrity of the slope of the ramp. Loss of shape will result in grades which may not be usable for certain equipment.

## (Optional) Speedy Board Cutouts


Save your crew the hassle of attaching and detaching a lifting chain with speedy board cutouts. Simply scoop up the board with your forklift tongs via the two cutouts and place/remove the board.

## (Optional) EZ Roll Handles

Standard MH30.2 -- In addition to the test for overall strength, a longstanding practice for dockboard manufacturers, this standard incorporates a test which sets limits for deflection of product while under load. This test ensures the integrity of the slope of the ramp. Loss of shape will result in grades which may not be usable for certain equipment.

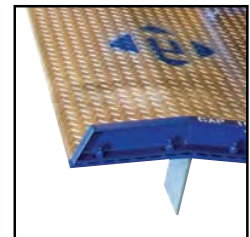


# MODEL AC & BC

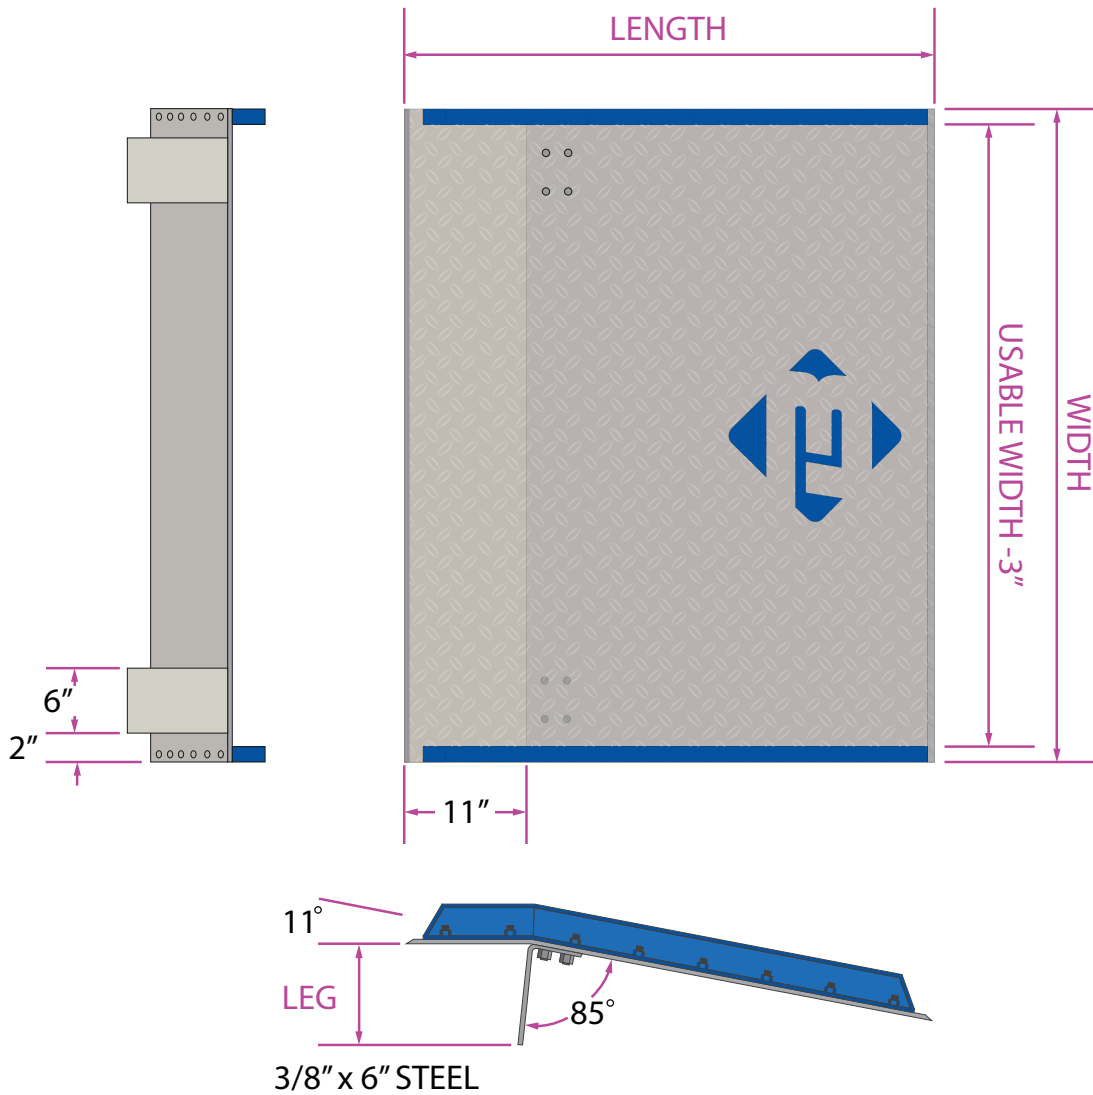

## SPECIFICATIONS

AC Model Capacity: 10,000 lbs.  
BC Model Capacity: 15,000 lbs.  
Usable Width: -3"  
Curb Height: 3" (4" on Lengths 66"+)  
Curb Width: 1.5"  
Leg Length: Varies by board length

BC6060

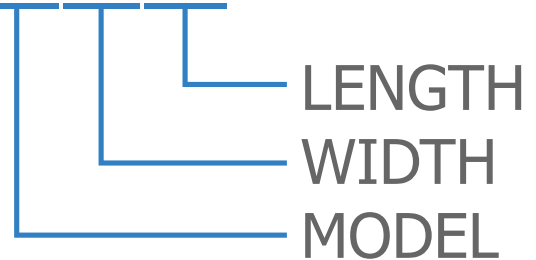

# MODEL AC & BC



MODEL AC 3/8" THICK PLATE					
10,000 lb capacity					
Model	Height Up		Width	Length	Wt. (lbs)
	Pallet Truck Elec Forklift	Propane Forklift			
AC6630	2"	3"	66"	30"	109
AC5436	3"	5"	54"	36"	111
AC6036	3"	5"	60"	36"	127
AC6636	3"	5"	66"	36"	128
AC7236	3"	5"	72"	36"	136
AC6042	4"	6"	60"	42"	140
AC6642	4"	6"	66"	42"	150
AC5448	5"	7"	54"	48"	146
AC6048	5"	7"	60"	48"	163
AC7248	5"	7"	72"	48"	179
AC7260	7"	9"	72"	60"	225
AC6054	6"	8"	60"	54"	179
AC6654	6"	8"	66"	54"	191
AC5460	7"	9"	54"	60"	184
AC6060	7"	9"	60"	60"	202
AC6072	8 1/2"	11"	60"	72"	253
AC6084	10"	13"	60"	84"	297
AC6090	11"	14"	60"	90"	317
AC6096	12"	15"	60"	96"	337

# MODEL AC & BC



MODEL BC 1/2" THICK PLATE					
15,000 lb capacity					
Model	Height Up		Width	Length	Wt. (lbs)
	Pallet Truck Elec Forklift	Propane Forklift			
BC6036	3"	5"	60"	36"	145
BC7236	3"	5"	72"	36"	167
BC5442	4"	6"	54"	42"	157
BC6042	4"	6"	60"	42"	170
BC5448	5"	7"	54"	48"	177
BC6048	5"	7"	60"	48"	201
BC7248	5"	7"	72"	48"	220
BC6060	7"	9"	60"	60"	247
BC7260	7"	9"	72"	60"	277
BC6072	8 1/2"	11"	60"	72"	304

OPTIONS AND ACCESSORIES	
Model / Part	Description
ACLC	Lifting chains
ACSL	Leg location other than 2 1/2" from edge of plate
ALEG	Extra leg with fasteners (each)
CAC	Full length pin pockets welded to the side curbs with four pins
EZ-L	EZ-Roll handle attachment (each) - Not recommended for all lengths and widths. Call for details.
EZ-R	EZ-Roll handle attachment (each) - Not recommended for all lengths and widths. Call for details.
R	Legs set at 14" from truck end for refrigerated trailers
TAC	Two pin pockets with holes and two pins in place of locking legs