

# MODEL T & C

## Steel Dock Board Model T & Model C

Designed and built to handle the most demanding loading environments. The Model T and Model C dock board offer both the versatility of a variable lip length and recessed lifting loops for portability, making it the most versatile dock ramp on the market.



- All-welded steel construction
- Capacities from 15,000 to 40,000 pounds
- Two styles: 2 pin or 4 pin
- Fold-down lifting loops
- Double-bend design
- In stock - 5 day lead time



## All Welded Steel Construction

All welded steel curbs, in place of bolt on curbs, give the Model T and Model C Dock Board a greater range of capacities while increasing the effective life of the dock board.

## Double Bend Design

Each end of the Model T and Model C dock board is optimized for smooth loading via a 9° bend on the dock side and a 7° bend for access into the trailer.

## Fold Down Lifting Loops

Fold down lifting loops eliminate the need for cumbersome and time consuming lifting chains. This improves work place safety and reduces the time it takes to pick up and place the dock board in position.

## Four Pins or Two Pins

2 Pin Model T: 2 steel pins offer a variable lip length to handle both standard and refrigerated trailers.



4 Pin Model C: for more demanding loading environments with unusual docking conditions, such as angled docking, or when freight must stop short of the dock.

## Full Length Pin Placement Positions


Unlike a 2 pin board, 4 pin dock boards with full length pin hole placement slots are capable of loading trucks docking at an angle. This style board is also capable of park out loading (depicted to the right); essential to trucks with lift gates and other attachments restricting proper docking against the bumpers.

## ANSI Rated Steel

Standard MH30.2 -- In addition to the test for overall strength, a longstanding practice for dockboard manufacturers, this standard incorporates a test which sets limits for deflection of product while under load. This test ensures the integrity of the slope of the ramp. Loss of shape will result in grades which may not be usable for certain equipment.




# MODEL T

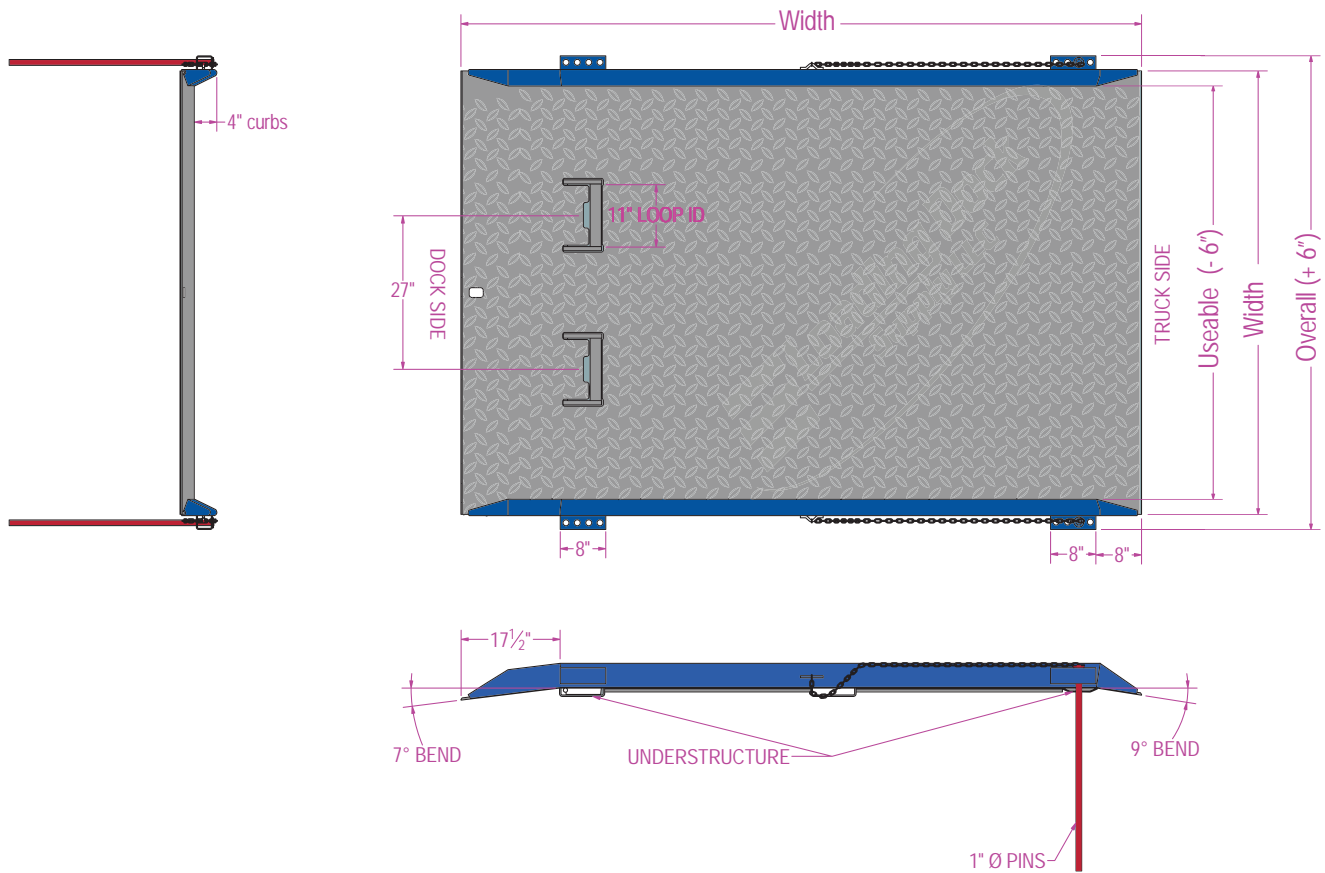

## SPECIFICATIONS

- Overall Width: +6"
- Usable Width: -6"
- Curb Height: 4"
- Curb Width: 3"
- Pin Length: Varies by board length

20T6060

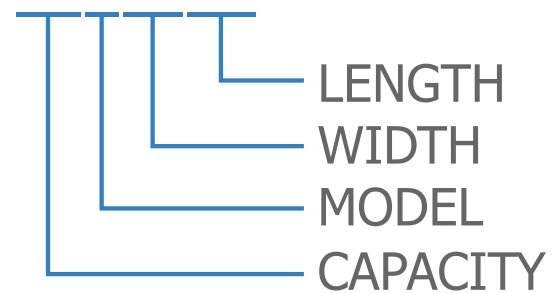

# MODEL T



MODEL T					
Model	Height Up		Width	Length	Wt. (lbs)
	Pallet Truck Elec Forklift	Propane Forklift			
<b>15,000 lb Capacity</b>					
15T6048	5"	7"	60"	48"	439
15T7248	5"	7"	72"	48"	506
15T8448	5"	7"	84"	48"	574
15T6060	7"	9"	60"	60"	523
15T7260	7"	9"	72"	60"	605
15T8460	7"	9"	84"	60"	686
15T6072	8 1/2"	11"	60"	72"	607
15T7272	8 1/2"	11"	72"	72"	703
15T8472	8 1/2"	11"	84"	72"	798
15T6084	10"	13"	60"	84"	692
15T7284	10"	13"	72"	84"	801
15T8484	10"	13"	84"	84"	910
15T7296	12"	15"	72"	96"	970
15T8496	12"	15"	84"	96"	1,022
<b>20,000 lb Capacity</b>					
20T6048	5"	7"	60"	48"	490
20T7248	5"	7"	72"	48"	568
20T8448	5"	7"	84"	48"	646
20T6060	7"	9"	60"	60"	605
20T7260	7"	9"	72"	60"	682
20T8460	7"	9"	84"	60"	775
20T6072	8 1/2"	11"	60"	72"	684
20T7272	8 1/2"	11"	72"	72"	795
20T8472	8 1/2"	11"	84"	72"	905
20T6084	10"	13"	60"	84"	781
20T7284	10"	13"	72"	84"	908
20T8484	10"	13"	84"	84"	1,035

# MODEL T



20,000 lb Capacity Continued>>>					
20T6096	12"	15"	60"	96"	879
20T7296	12"	15"	72"	96"	1,022
20T8496	12"	15"	84"	96"	1,165
25,000 lb Capacity					
25T6048	5"	7"	60"	48"	592
25T7248	5"	7"	72"	48"	690
25T8448	5"	7"	84"	48"	788
25T6060	7"	9"	60"	60"	715
25T7260	7"	9"	72"	60"	834
25T8460	7"	9"	84"	60"	954
25T6072	8 1/2"	11"	60"	72"	855
25T7272	8 1/2"	11"	72"	72"	978
25T8472	8 1/2"	11"	84"	72"	1,120
25T6084	10"	13"	60"	84"	960
25T7284	10"	13"	72"	84"	1,123
25T7296	12"	15"	72"	96"	1,267

Options	
Model / Part	Description
R	Legs set at 14" from truck end for refrigerated trailers (option for TFL and TNB Models)
SB	Speedy Board® cutout option: available on T, TFL, and TNB boards in place of lifting loops or lifting chains
TLC	Lifting chains and lifting loops
TLP20	Replacement locking pin with chain (20")
TLP24	Replacement locking pin with chain (24")
TLP30	Replacement locking pin with chain (30")
TLP36	Replacement locking pin with chain (36")
TNLL	Lifting chains without lifting loops