

# BUMPERS

## Steel Faced & Durasoft Bumpers

Maintenance free, weather resistant, and highly effective impact absorption make laminated dock bumpers an essential component for every loading dock operation. With a variety of heights, widths, thicknesses, and the warranty to back them Loading Dock Supply has the bumper solution for any loading dock operation.

- Ideal for docks with air ride trailers or high capacity forklifts
- Absorbs over 80% of truck impact and shock
- Leading bumper sold in the industry today
- Protection against vehicle damage to docks, buildings and cargo
- Available in heights up to 36"
- Available in depths up to 6¾"
- Maintenance free
- American Manufactured

## Material

- Fabric reinforced rubber pads cut from selected recycled truck tires
- ¼" Black powder coated steel angles
- ¾" Steel carriage bolt tie rods
- 3/8" Black powder coated steel-face plate

## Installation

- Structural steel angles mechanically fastened or welded by 3/4" anchors to dock face
- Weldable flat plate option available at no additional cost \*lead times apply

## Specifications

- Resilient rubber material of bumper shall be cut to uniform size pads
- Pads punched to receive 3/4" supporting rods.
- Plate to be welded to slotted steel support plates which extend back to the 3/4" supporting rods. brackets to be punched with elongated slots allowing steel-face to "move" on impact.
- Tough plies of truck tires provide superior resistance to chipping or abrasion
- Manufactured under pressure exceeding 1,500 lbs.
- Anchor bolts are protected by at least 3" of rubber to prevent damage
- Durasoft models only: Longer looped pads inserted between standard spacer pads allow approximately 1/2" flex of looped pads upon impact.
- Black powder coat finish only




## Upgrade to Durasoft

A step up from the competition the Durasoft dock bumper offers the highest level of impact resistance among any laminated bumper. Its patented loop design and floating steel plate also provide an additional level of protection against the up and down movement experienced with air ride trailers and/or movement of high capacity forklifts.


- Unparalleled ability to deflect and absorb shock with loop design.
- Maximum dock and truck protection available on the market today
- Eliminates wear from up and down trailer movement
- Impervious to weather
- Maintenance Free
- 5 Year Warranty

## Warranty

5 Year manufacturers warranty on 4.5" and 6" deep bumpers

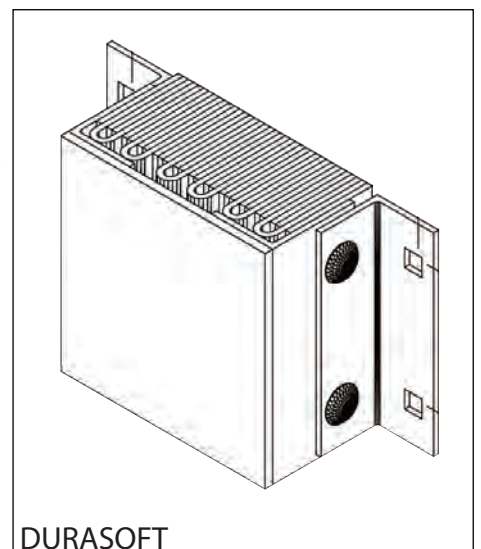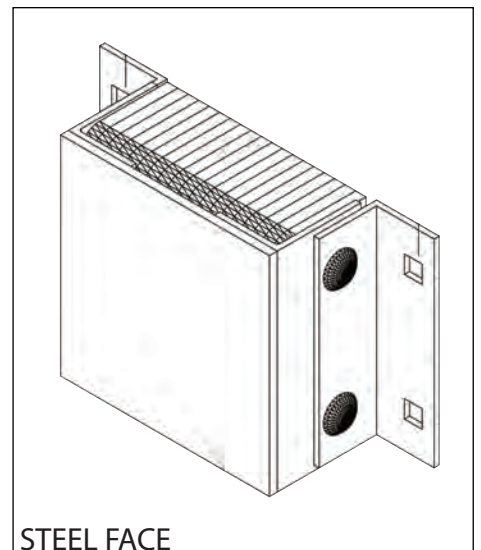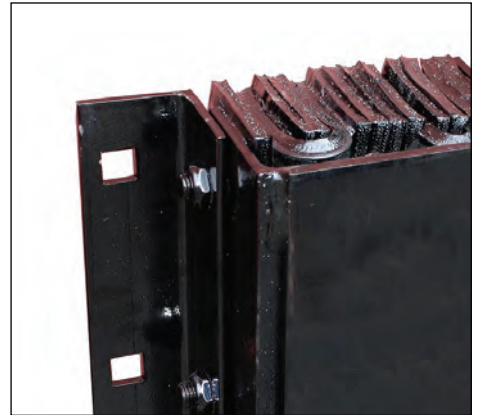

# DOCK BUMPER

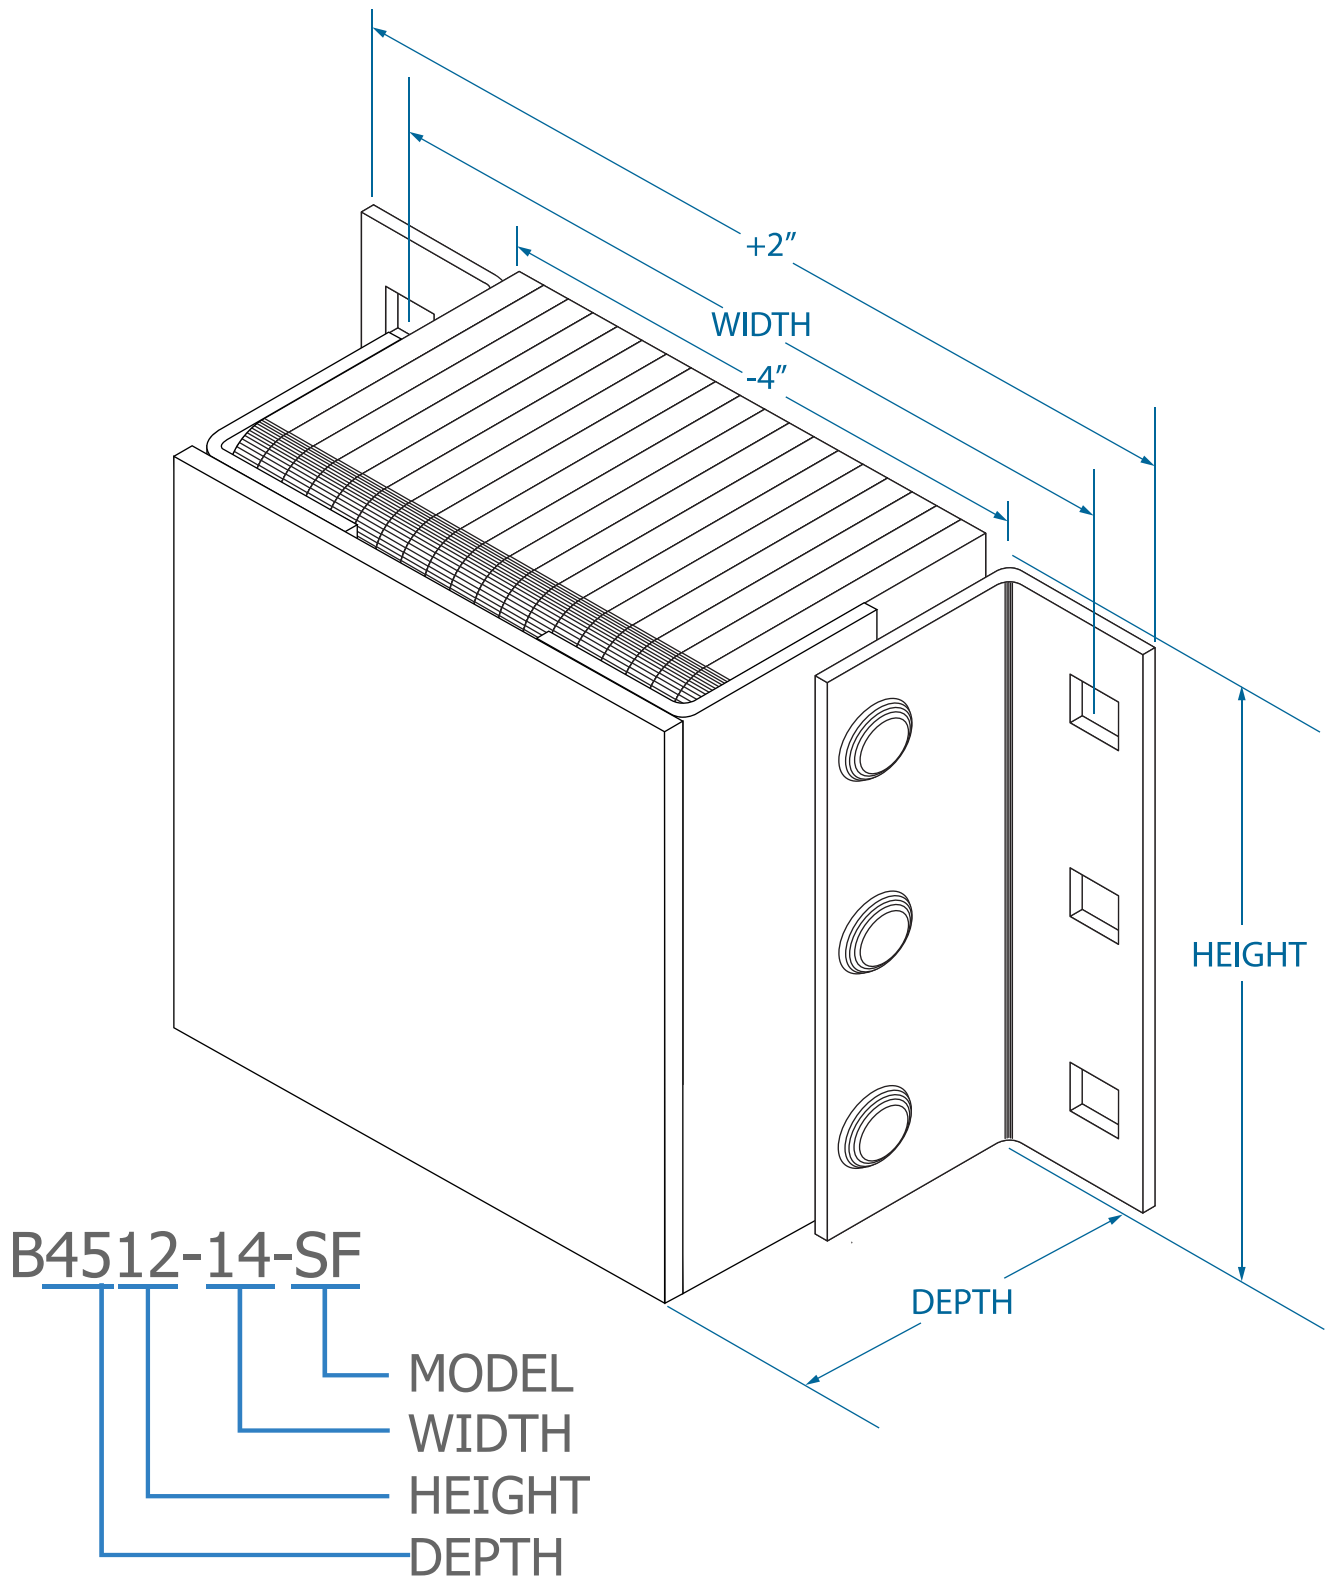

## SPECIFICATIONS

Outside to Outside Width:  $+2''$

Rubber Width:  $-4''$

# DOCK BUMPERS



## Steel Face Dock Bumpers

### 4 1/2" Thick Series - Approximate Overall Thickness 5 1/8"

| Model       | Depth | Height | Width | Weight lbs. Each |
|-------------|-------|--------|-------|------------------|
| B4506-24-SF | 4.5"  | 6"     | 24"   | 50#              |
| B4506-36-SF | 4.5"  | 6"     | 36"   | 75#              |
| B4510-14-SF | 4.5"  | 10"    | 14"   | 48#              |
| B4510-18-SF | 4.5"  | 10"    | 18"   | 58#              |
| B4510-24-SF | 4.5"  | 10"    | 24"   | 73#              |
| B4510-36-SF | 4.5"  | 10"    | 36"   | 117#             |
| B4512-14-SF | 4.5"  | 12"    | 14"   | 58#              |
| B4512-18-SF | 4.5"  | 12"    | 18"   | 72#              |
| B4512-24-SF | 4.5"  | 12"    | 24"   | 90#              |
| B451236-SF  | 4.5"  | 12"    | 36"   | 145#             |
| B4520-11-SF | 4.5"  | 20"    | 11"   | 73#              |
| B4524-11-SF | 4.5"  | 24"    | 11"   | 88#              |
| B4536-11-SF | 4.5"  | 36"    | 11"   | 155#             |

### 6" Thick Series - Approximate Overall Thickness 6 5/8"

|            |    |     |     |      |
|------------|----|-----|-----|------|
| B610-14-SF | 6" | 10" | 14" | 55#  |
| B610-18-SF | 6" | 10" | 18" | 65#  |
| B610-24-SF | 6" | 10" | 24" | 85#  |
| B610-36-SF | 6" | 10" | 36" | 129# |
| B612-14-SF | 6" | 12" | 14" | 62#  |
| B612-18-SF | 6" | 12" | 18" | 78#  |
| B612-24-SF | 6" | 12" | 24" | 105# |
| B612-36-SF | 6" | 12" | 36" | 166# |
| B620-11-SF | 6" | 20" | 11" | 83#  |
| B624-11-SF | 6" | 24" | 11" | 100# |
| B636-11-SF | 6" | 36" | 11" | 160# |

NOTE: 1/4" flat plates may be substituted for one or both angles