




Dock Survey Trailer Restraint

1. Survey must be completed based upon conditions at time of installation.
2. Dock face must be clear of any obstructions prior to installation of the Lock & Load™
3. Lights and signs must be mounted in full view of forklift and tractor-trailer operations.
4. Examples of why bracketing may be required:
 - A. Sloped approach greater than 1/2" per foot.
 - B. Bumper projection over 4". (Bumpers are manufactured to nominal sizes; actual projection must be verified)
 - C. Insufficient embedded front pit curb angle.
 - D. 24" Deep pits.
5. Other than solid concrete dock face (6" thick minimum)
6. Hollow "D" and flex steel bumpers not acceptable.
7. If question 23 is positive for existing brackets or dock face obstructions attach photos of each affected dock position. These special applications will require optional equipment.

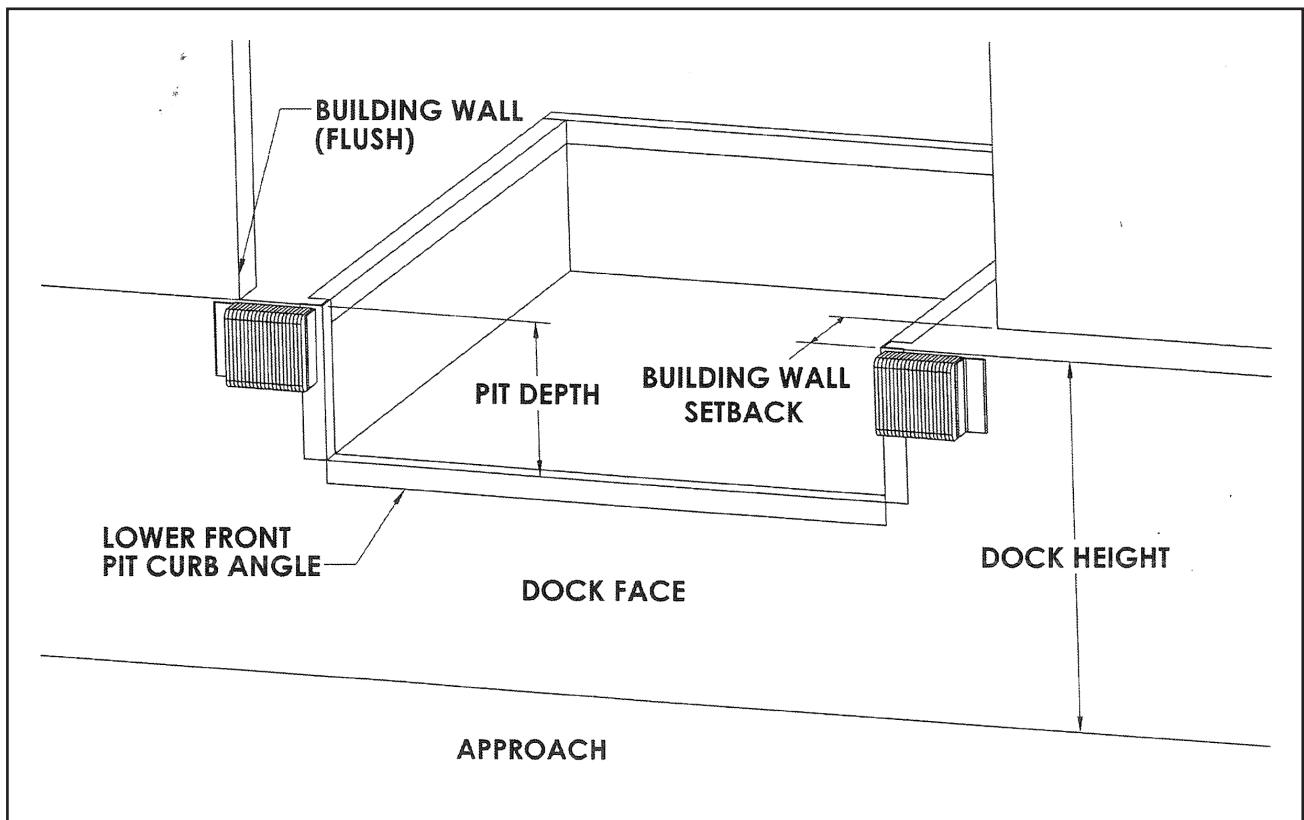

Customer: _____
Surveyed by: _____ Date: _____ QTY _____

1. Dock/Door #'s: _____

2. Is this the Dock Leveler Truck Activated?

Yes

No

3. Bottom of Lip to Ground: _____ in. Note: Enter "0" for no leveler

4. Lip Saddle Projection from dock face _____ in.

5. Barrier Lip

Yes

No

6. Top of pit angle to ground/front frame depth: _____ in.

NOTE: Enter front frame height for levelers on self standing frames. enter "0" if no leveler or EOD type leveler.

7. Dock Height: _____ in.

8. Dock face mounting surface

Concrete, solid tilt-up precast, min 6" thick

Concrete, min 6" thick, embedded mounting plate

Brick/cinder block, hollow tilt-up/precast

Stub wall (partial wall w/open pit)

Legs/self standing frames

Other

9. Is the pit floor material concrete?

Yes

No

10. If the pit does not exist, is the dock floor concrete?

Yes

No

11. Is there an existing floor plate bracket?

Yes

No

12. Bumper projection: _____ in.

13. Lower front pit curb angle

3x3

4x4

None

Pan Material

14. Wall position to dock face

Flush

Protruding

Set Back

Not applicable

15. Amount of wall set back/protrusion: _____ in.

16. Cantilever Height off approach: _____ in.

17. Projection of cantilever: _____ in.

18. Sub frame position to dock face:


Flush

Protruding

Set Back

Not Applicable

19. Sub-frame set back/protrusion: _____ in.

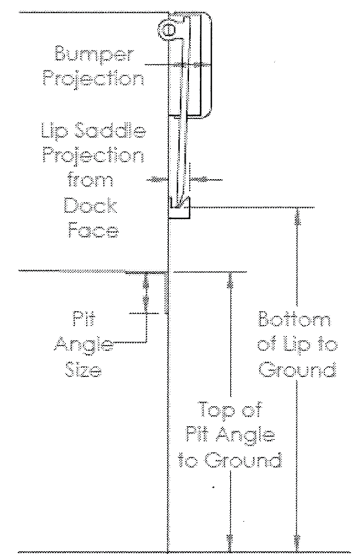

20. Will Yard Jockeys be used:


Yes No

21. Drive/Approach material at dock face:

Concrete Asphalt Gravel//dirt Other_____

22. Is the Approach Level or Sloped?

Level (if level disregard Quest. A, B , & C) Sloped

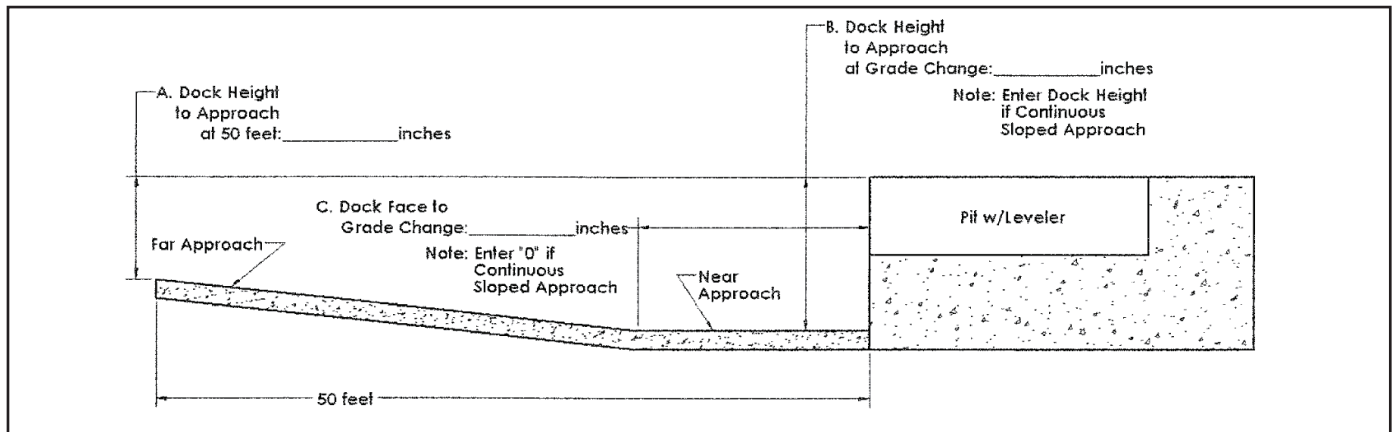

23. Will this application incorporate trailer lifts, wheel risers, existing brackets (aftermarket upgrade) or obstructions on the dock face?

no Existing brackets Trailer lift Dock Face Obstructions

Wheel Risers

24. If a trench drain is located within 4' of the dock face, provide dimensions A & B

25. Will manufacturer supply cantilever bracket for leveler?



Yes No

26. Will manufacturer supply floor bracing for leveler?

Yes No

27. Will manufacturer supply additional anchors?

Yes No

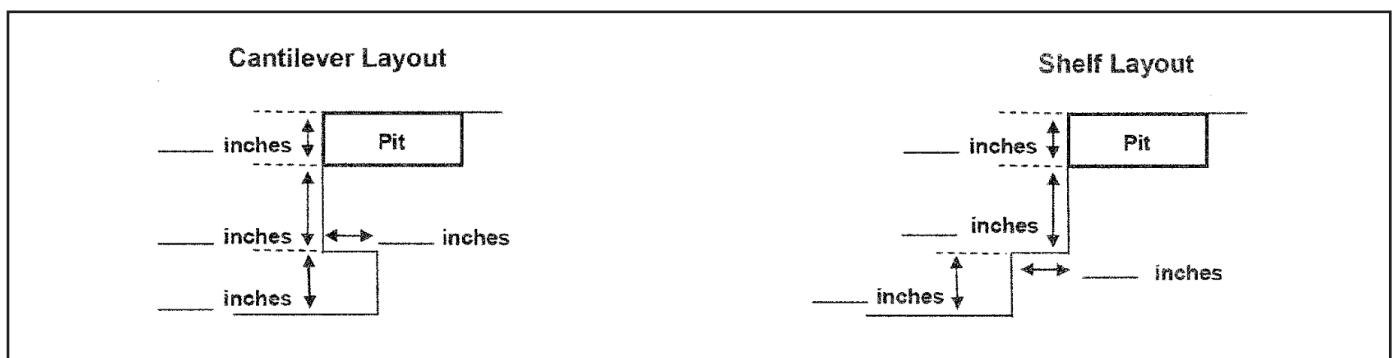

THIS SECTION MUST BE COMPLETED FOR EDGE OF DOCK LEVELERS

