

Mars "888" Traffic Breaker



Mars TB8-L1 - Pedestal Mount



Mars TB8-L1 - Flush Mount



Description

The iconic Mars "888" Traffic Breaker is now available with energy efficient, long life LED's. This rugged LED light is offered in addition to the classic halogen version already widely used today. Both warning lights utilize a distinctive gimbal mounted lamp to generate a "triple eight" light pattern that alerts traffic to approaching emergency equipment.

The polished stainless steel housing looks great on any vehicle. These warning beacons provide a bright oscillating light that aids in clearing the road, day or night, even in adverse conditions.

Features

- The 850 Lumen LED lamp provides superior illumination.
- The distinctive "triple eight" light pattern demands attention.
- Lamp oscillates inside the fixture housing for protection and stability.
- Pedestal or flush mounted styles available
- Lens color choice in red or clear
- Voltage range of 12 to 24 VDC

Why make the switch to LED?

- LED models are three times brighter than halogen models yet draw less than half the Amps.
- LED fixtures have an average life of 50,000 hours versus average life of 300 hours for halogen bulbs
- LED models are more durable than halogen models; no fragile filaments to break


Looking to update your existing Mars TB8 with LED technology?

- Upgrade your existing halogen fixtures with our LED retrofit kit


Mars "888" Traffic Breaker



Mars TB8 - Pedestal Mount

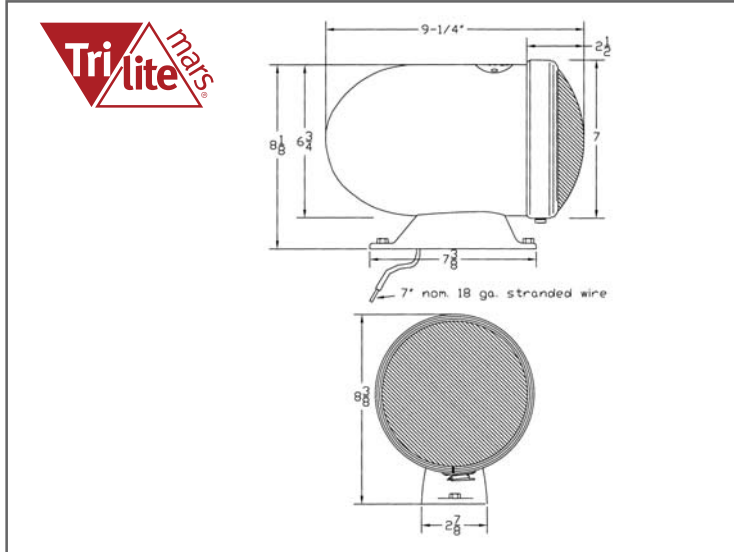

Mars TB8 - Flush Mount

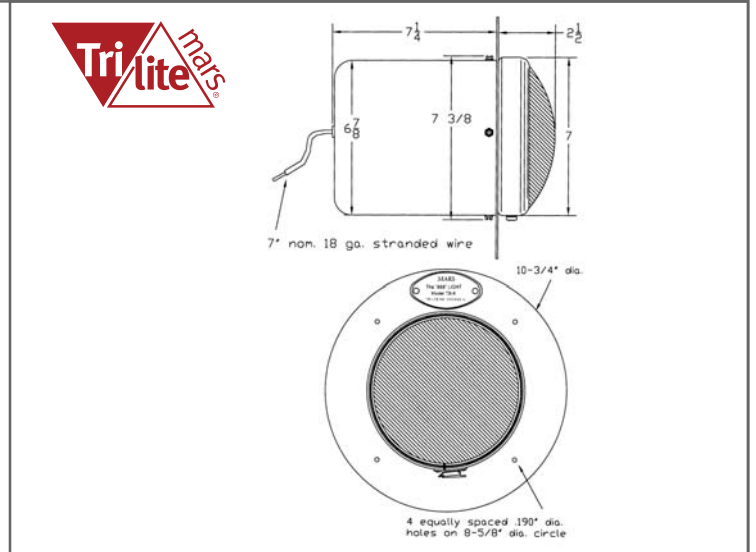

Product Number Information

LED ModelsProduct Number

12-24VDC Pedestal Mount..... TB8-L1-P/*

12-24VDC Flush Mount TB8-L1-F/*

Halogen ModelsProduct Number

12VDC Pedestal Mount TB8-12P/*

12VDC Flush Mount..... TB8-12F/*

24VDC Pedestal Mount TB8-24P/*

24VDC Flush Mount..... TB8-24F/*

*Specify Lens Color:

C..... Clear

R Red

Replacement Part Information

PartProduct Number

Bracket, Pedestal Mount 136020

Bulb (60,000CP), 12V 426006

Large Gear Assembly..... 196001A

Small Gear Assembly..... 196007A

Gasket, Lens..... 816014

Gasket, Base..... 816007

Clear Lens 226000

Red Lens 226001


Motor, 12V..... 166028T

Chrome Ring, Split 166024T

Chrome Ring, FLush Mount 116001

Polar Candle Distribution

THE LED IS AN
EXTREME SPOT-
LIGHT THAT GRABS
ATTENTION, EVEN
AT A DISTANCE.

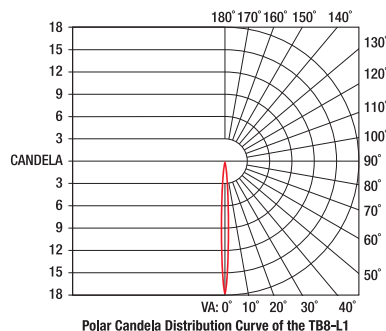

Electrical Specification

Mars TB8-L1

Lamp Type.....LED

Current.....1.36 at 12VDC

Estimated Lamp Life50,000 Hours Minimum

Mars TB8

Lamp Type.....Halogen

Current.....3.1a at 12VDC

Estimated Lamp Life300 Hours